




Factors

Introduction




- Joyfully Read Chapter 12
- Additional Package
 - `> library(forcats)`
 - Not Part of the tidyverse
- For Variables with,
 - Fixed Set of Values
 - Known Set of Values
- Sophisticated Character Vector
- Factors Are on a
New Level

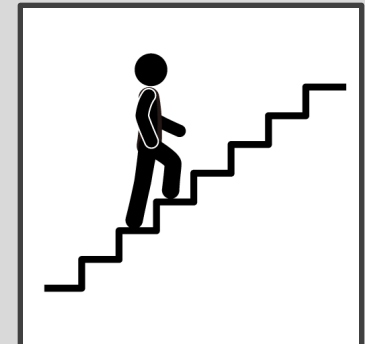

Level 1: Motivation



- Eye Color Distribution
 - Randomly Sample 50 People
 - Distribution via Bar Plot

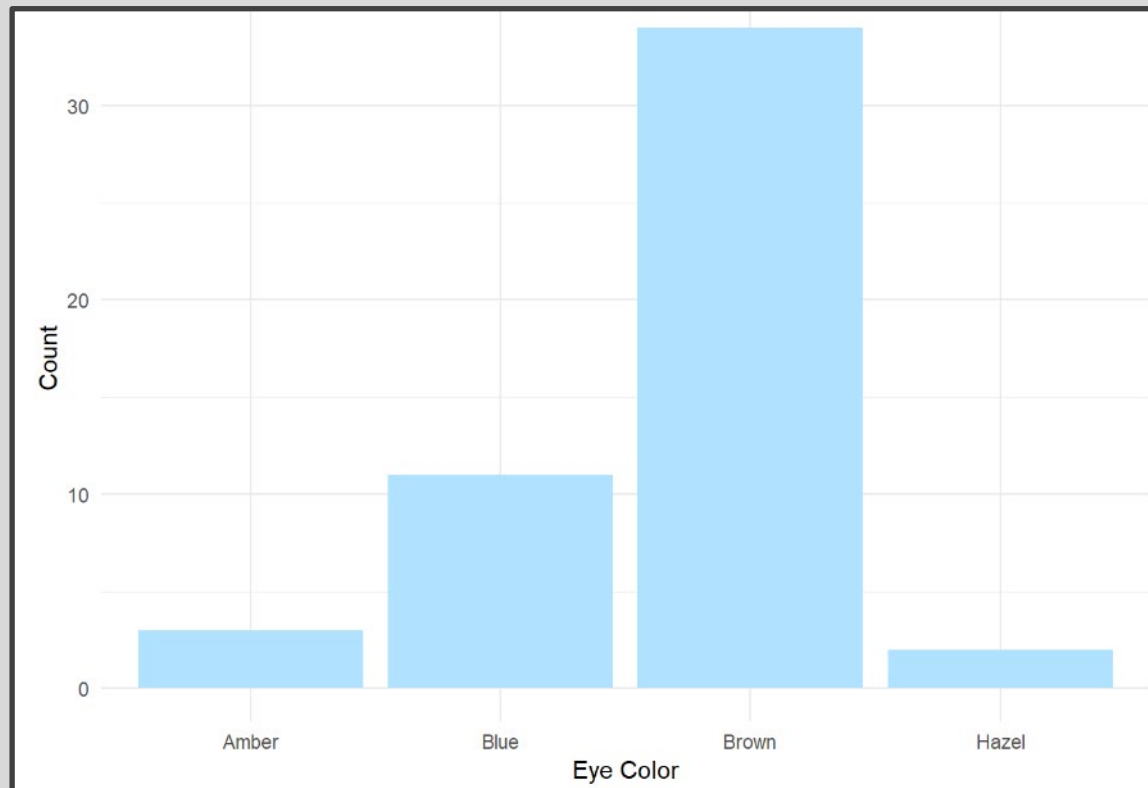


- How to Make More Informative?

Level 1: Motivation



- Eye Color Distribution (Cont.)
 - Display Eye Colors Absent From Sample

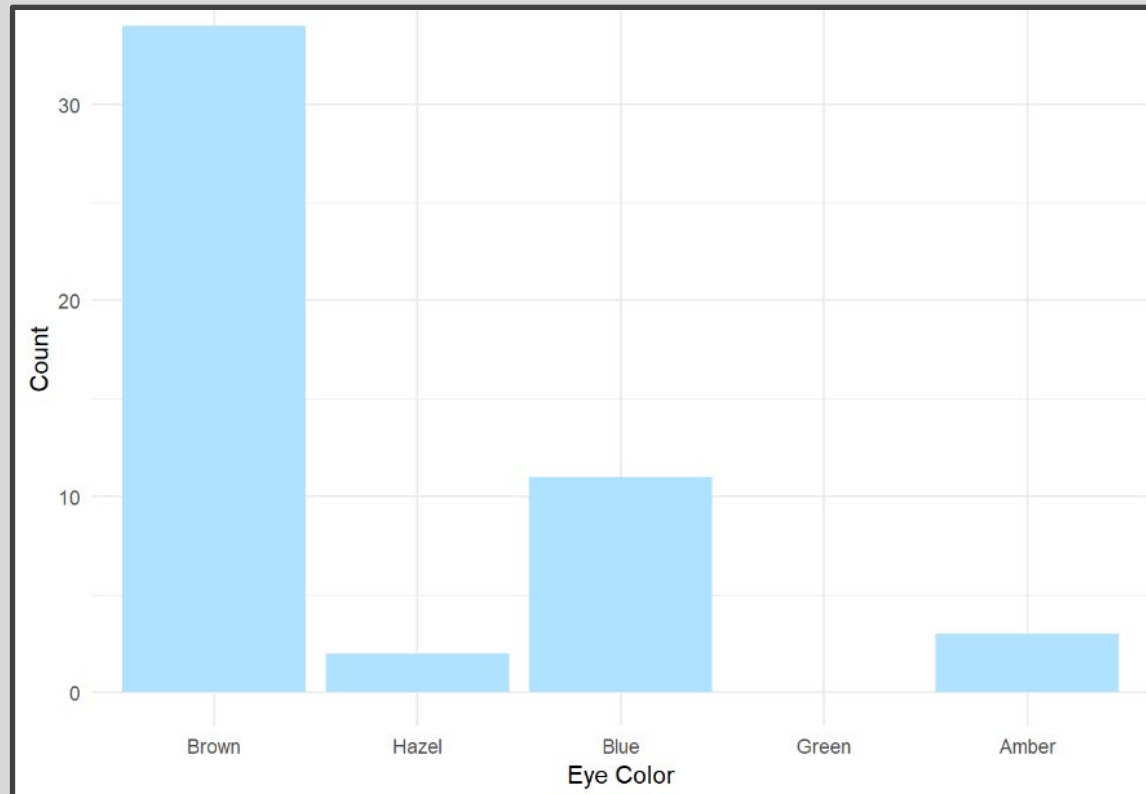

Level 1: Motivation




- Survey Results
 - How Would You Describe Dr. Mario's Teaching?
 - Magical
 - Alright
 - Regular
 - Inferior
 - Offensive
 - Class of 80 Students Answer End-of-the-Year Survey

Level 1: Motivation



- Survey Results (Cont.)
 - Distribution of Results

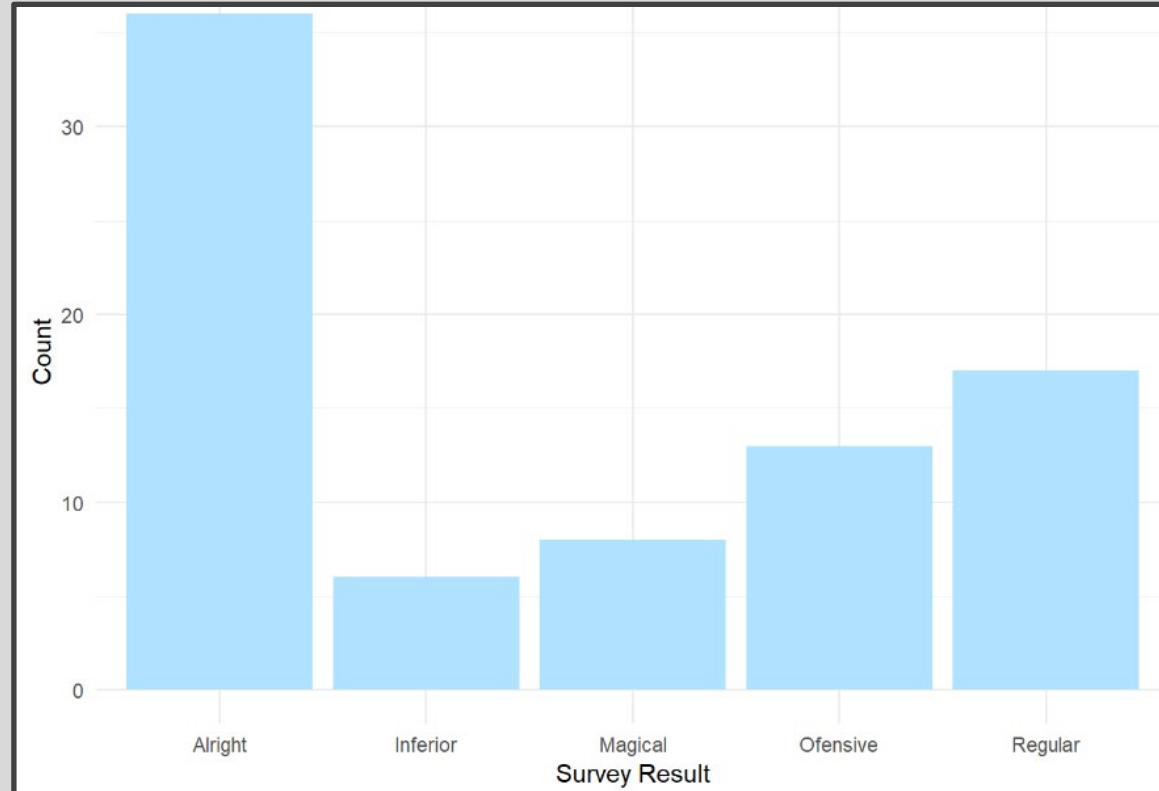


- What is Wrong?

Level 1: Motivation




- Survey Results (Cont.)
 - Misspelling “Offensive” is Offensive
 - Ordinal Categorical Variable

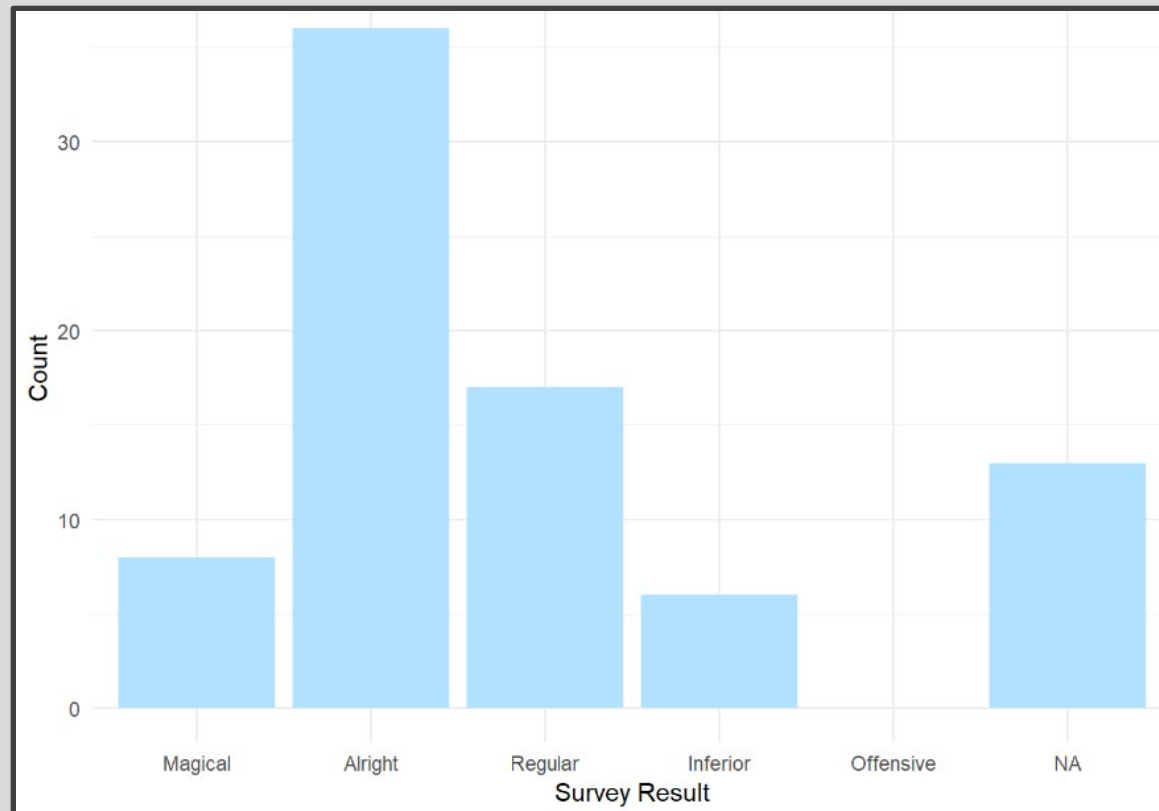

Level 1: Motivation



- Urbanicity
 - Classification {1,2,3,4}
 - Sample 1000 Households and Record Their Urbanicity

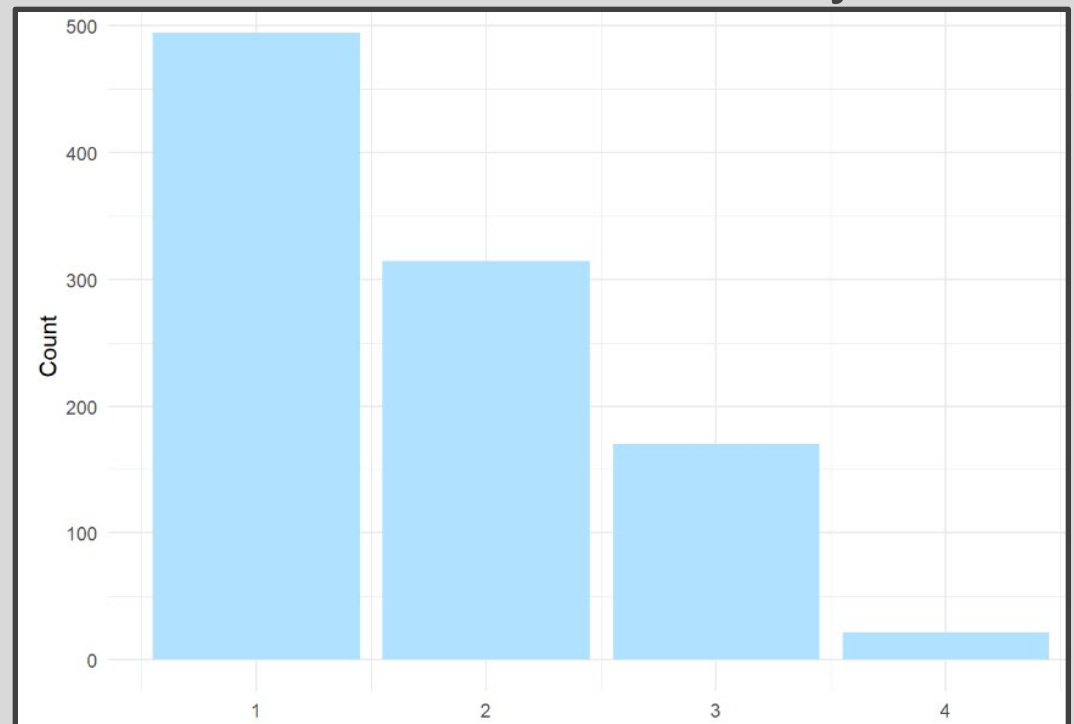


- What Would Make this Better?

Level 1: Motivation



- Urbanicity
 - Data Dictionary
 - 1 = Metropolitan
 - 2 = Burbs
 - 3 = Rural
 - 4 = Isolated

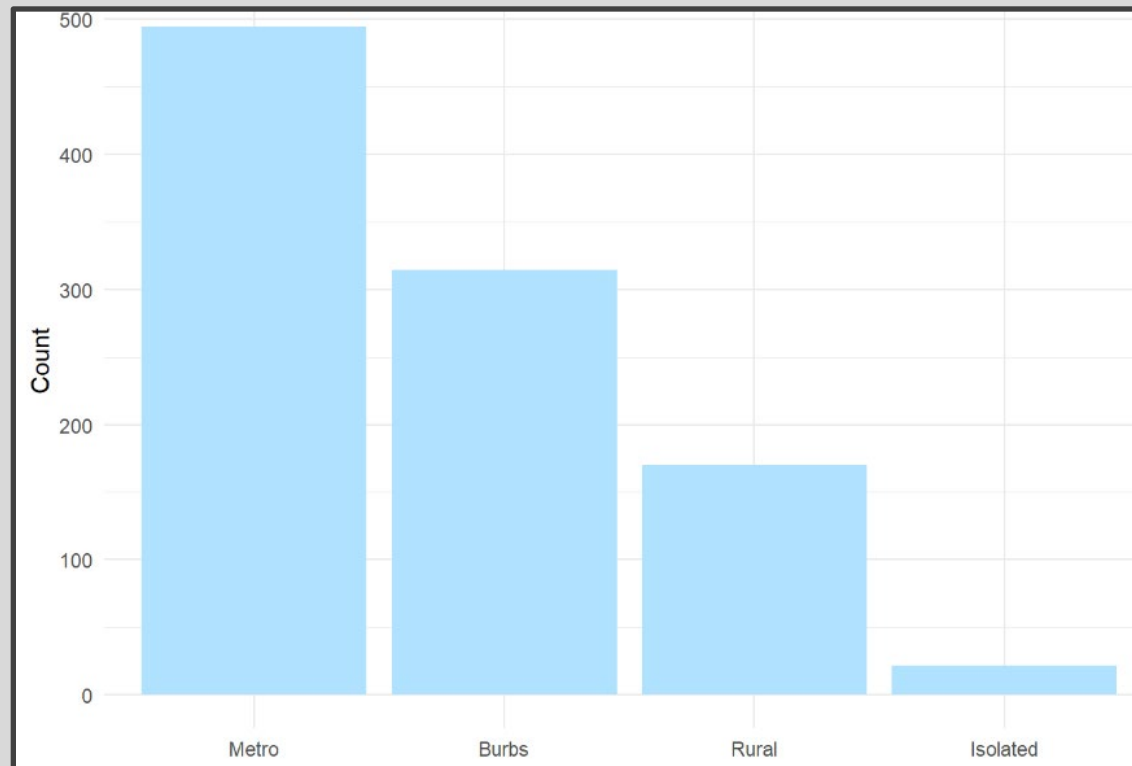

Level 2: Factor Variable Architecture



- Factor Variables Have Levels

```
Height = c("Tall", "Short", "Tall",  
          "Tall", "Short", "Medium",  
          "Short", "Medium", "Tall")  
Height.fct = as.factor(Height)  
print(Height)
```

```
## [1] "Tall" "Short" "Tall" "Tall" "Short" "Medium" "Short" "Medium"  
## [9] "Tall"
```

```
levels(Height)
```

```
## NULL
```

```
print(Height.fct)
```

```
## [1] Tall Short Tall Tall Short Medium Short Medium Tall  
## Levels: Medium Short Tall
```

```
levels(Height.fct)
```

```
## [1] "Medium" "Short" "Tall"
```



Default: Alphabetical

Level 2: Factor Variable Architecture



- Level Order May Be Specified

```
Height2.fct = factor(Height,levels=c("Short", "Medium", "Tall"))  
levels(Height2.fct)
```

```
## [1] "Short" "Medium" "Tall"
```

```
print(Height2.fct)
```

```
## [1] Tall   Short  Tall   Tall   Short  Medium Short  Medium Tall
```

```
## Levels: Short Medium Tall
```

Level 2: Factor Variable Architecture



- Levels May Be Labeled

```
Height3.fct = factor(Height, levels=c("Short", "Medium", "Tall"),  
                    labels=c("S", "M", "T"))  
levels(Height3.fct)
```

```
## [1] "S" "M" "T"
```

```
print(Height3.fct)
```

```
## [1] T S T T S M S M T  
## Levels: S M T
```

```
Height4.fct = factor(Height, levels=c("Short", "Medium", "Tall"),  
                    labels=c("Short", "Not Short", "Not Short"))  
levels(Height4.fct)
```

```
## [1] "Short"      "Not Short"
```

```
print(Height4.fct)
```


```
## [1] Not Short Short      Not Short Not Short Short      Not Short Short  
  
## [8] Not Short Not Short  
## Levels: Short Not Short
```

Level 2: Factor Variable Architecture



- Graphic Comparison

```
ggplot(data=tibble(x=Height.fct)) +  
  geom_bar(aes(x),fill="lightskyblue1") +  
  theme_minimal()
```

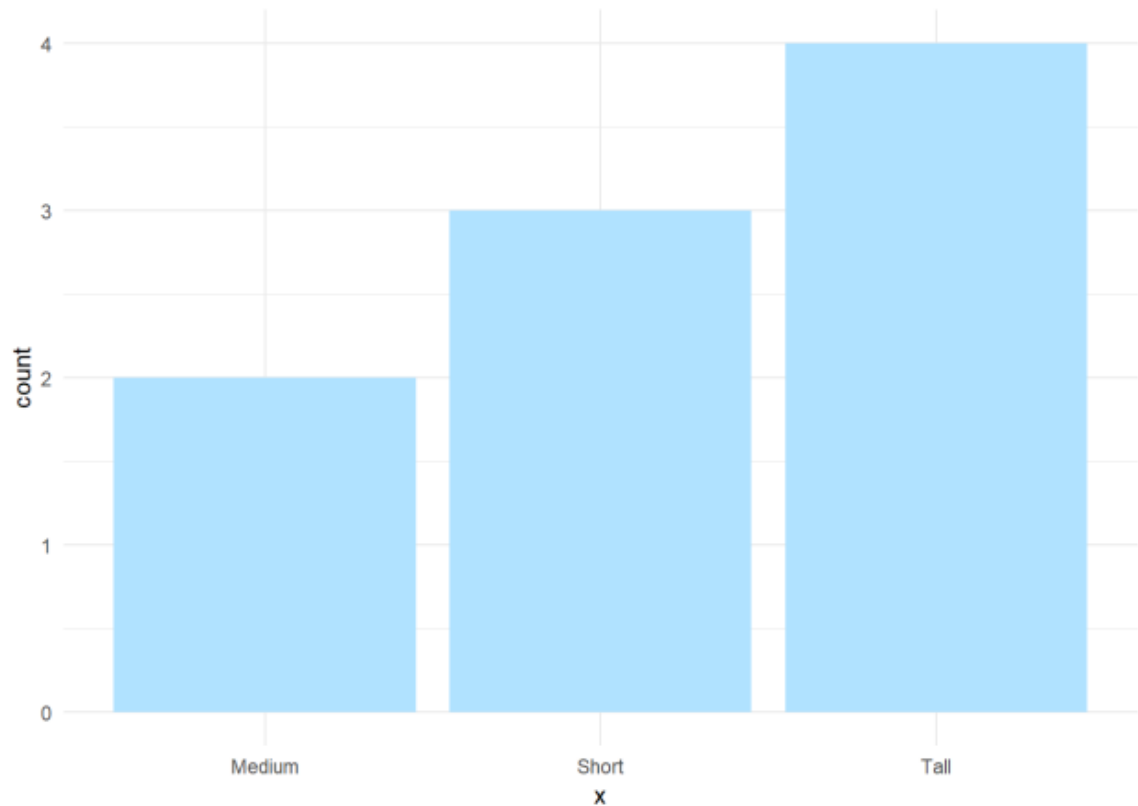


Level 2: Factor Variable Architecture



- Graphic Comparison

```
ggplot(data=tibble(x=Height2.fct)) +  
  geom_bar(aes(x),fill="lightskyblue1") +  
  theme_minimal()
```

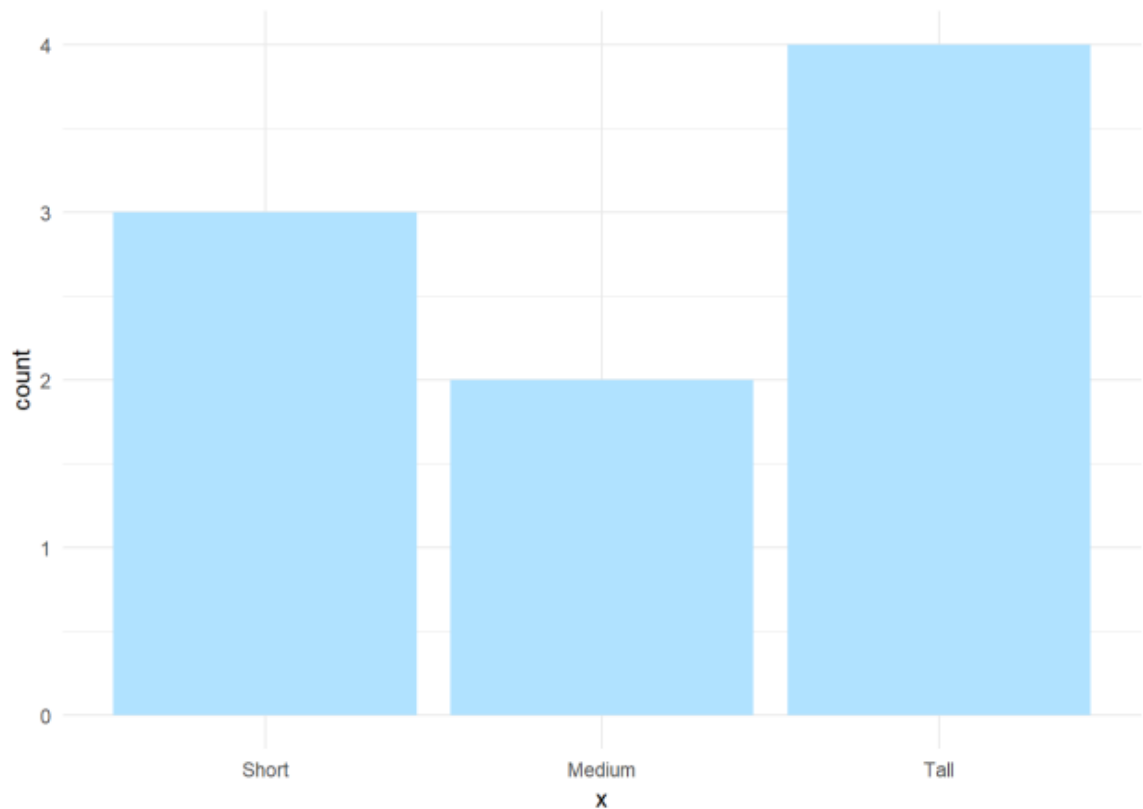


Level 2: Factor Variable Architecture



- Graphic Comparison

```
ggplot(data=tibble(x=Height3.fct)) +  
  geom_bar(aes(x),fill="lightskyblue1") +  
  theme_minimal()
```

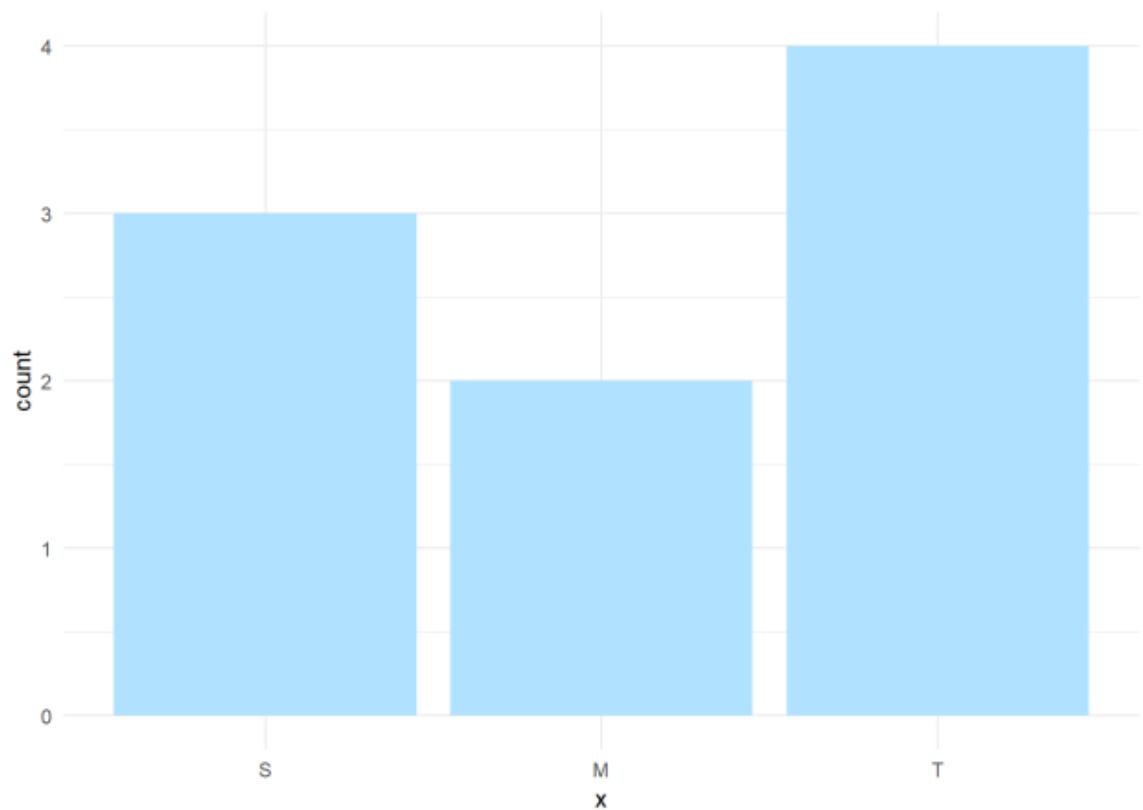


Level 2: Factor Variable Architecture



- Graphic Comparison

```
ggplot(data=tibble(x=Height4.fct)) +  
  geom_bar(aes(x),fill="lightskyblue1") +  
  theme_minimal()
```

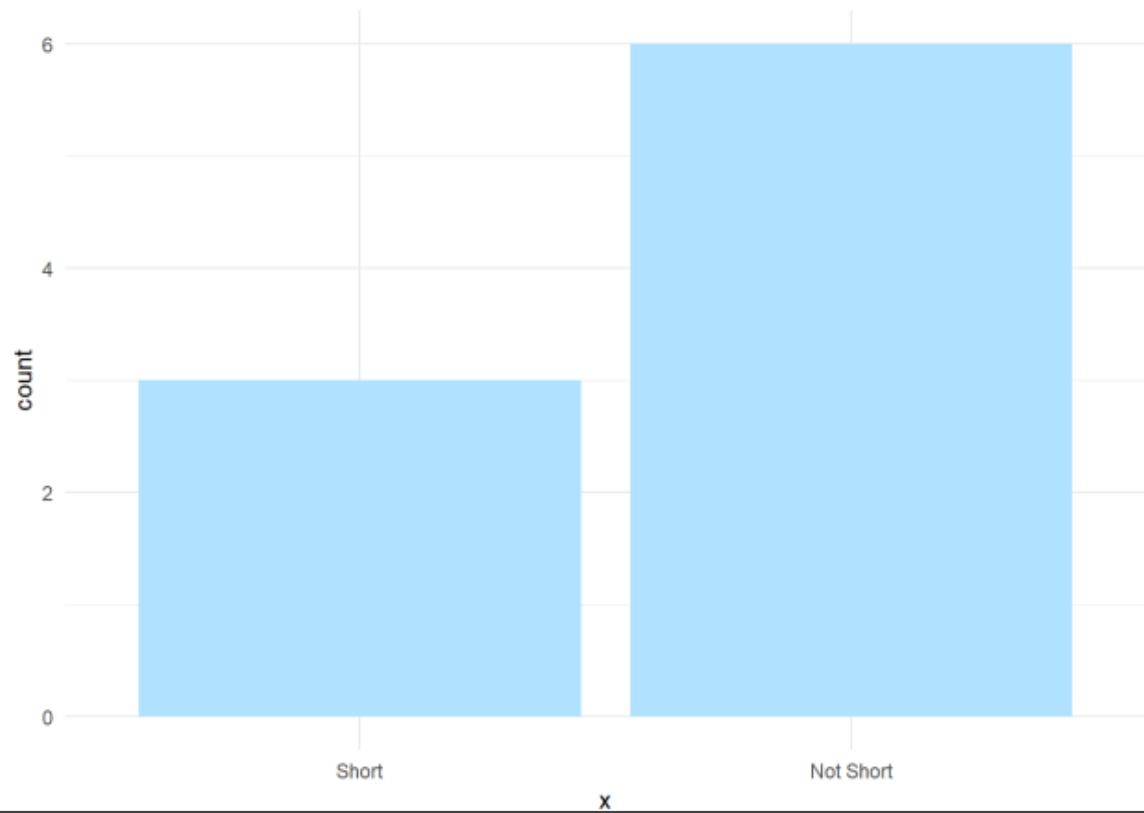

Level 3: General Social Survey



- University of Chicago

About the GSS

The General Social Survey

Since 1972, the General Social Survey (GSS) has provided politicians, policymakers, and scholars with a clear and unbiased perspective on what Americans think and feel about such issues as national spending priorities, crime and punishment, intergroup relations, and confidence in institutions.

[About the GSS](#)

Level 3: General Social Survey



- Sample Provided in forcats

```
Social=gss_cat  
glimpse(Social)
```

```
## Observations: 21,483  
## Variables: 9  
## $ year <int> 2000, 2000, 2000, 2000, 2000, 2000, 2000, 2000, 2000, ...  
## $ marital <fct> Never married, Divorced, Widowed, Never married, Divor...  
## $ age <int> 26, 48, 67, 39, 25, 25, 36, 44, 44, 47, 53, 52, 52, 51...  
## $ race <fct> White, White, White, White, White, White, White, White...  
## $ rincome <fct> $8000 to 9999, $8000 to 9999, Not applicable, Not appl...  
## $ partyid <fct> Ind,near rep, Not str republican, Independent, Ind,nea...  
## $ relig <fct> Protestant, Protestant, Protestant, Orthodox-christian...  
## $ denom <fct> Southern baptist, Baptist-dk which, No denomination, N...  
## $ tvhours <int> 12, NA, 2, 4, 1, NA, 3, NA, 0, 3, 2, NA, 1, NA, 1, 7, ...
```

- Factor Variables Included
 - Marital
 - Race
 - Income Range
 - Political Party
 - Religion
 - Denomination

Level 4: Modifying Factor Order



- Summary by Race

```
race.summary = Social %>%
  group_by(race) %>%
  summarize(
    n=n(),
    avg.age=mean(age, na.rm=T),
    avg.tv=mean(tvhours, na.rm=T)
  )
race.summary
```

```
## # A tibble: 3 x 4
##   race      n avg.age avg.tv
##   <fct> <int> <dbl> <dbl>
## 1 Other  1959   39.5  2.76
## 2 Black  3129   43.9  4.18
## 3 White 16395   48.7  2.77
```

```
levels(Social$race)
```

```
## [1] "Other"          "Black"          "White"          "Not applicable"
```

```
levels(race.summary$race)
```


```
## [1] "Other"          "Black"          "White"          "Not applicable"
```

Level 4: Modifying Factor Order



- Comparing TV Hours

```
ggplot(race.summary) +  
  geom_bar(aes(y=avg.tv, x=race), stat="identity", size=4)
```

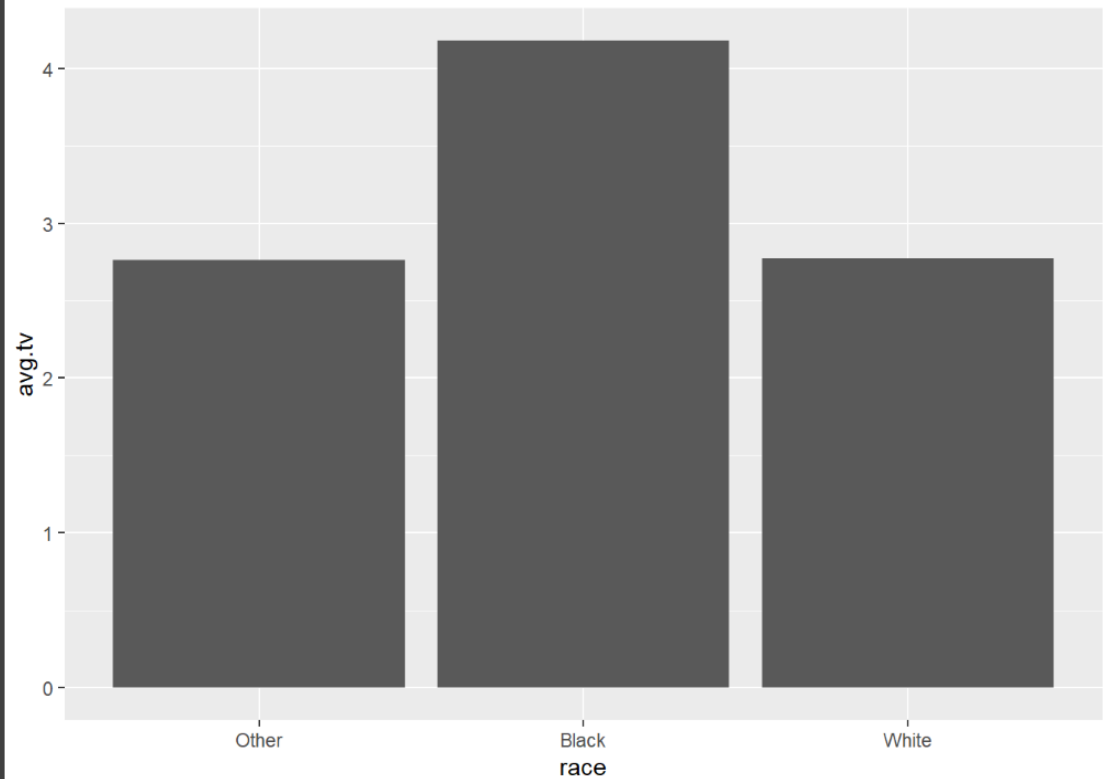

Level 4: Modifying Factor Order




- `fct_reorder()`
 - `f` = Factor Variable
 - `x` = Numeric Vector
 - `fun` = Optional Function If Multiple Values of `x` for Each Value of `f` (Default: Median)

Level 4: Modifying Factor Order



- Example 1: Reorder

```
ggplot(race.summary) +  
  geom_bar(aes(y=avg.tv, x=fct_reorder(race, avg.tv)), stat="identity", size=4)
```

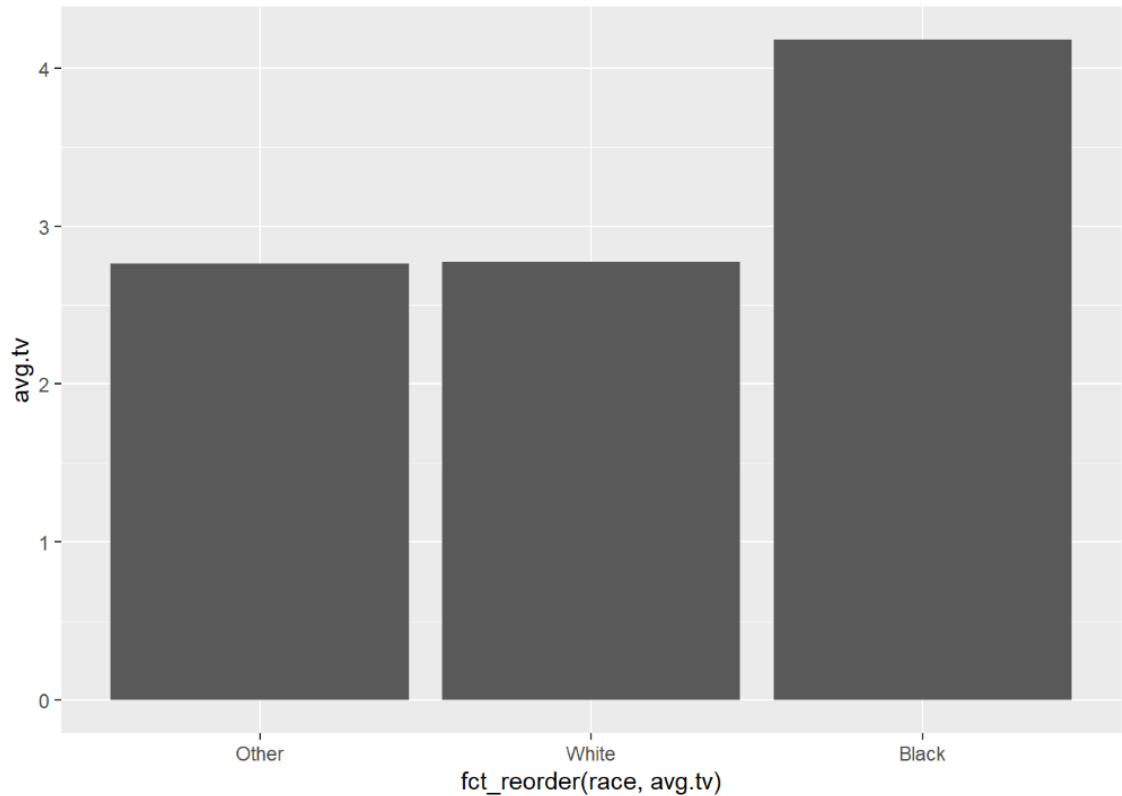


Level 4: Modifying Factor Order



- Example 2: Reorder

```
ggplot(Social) +  
  geom_boxplot(aes(x=fct_reorder(race, tvhours, .fun=median, na.rm=T),  
                  y=tvhours)) +  
  xlab("") + ylab("") +  
  theme_minimal()
```

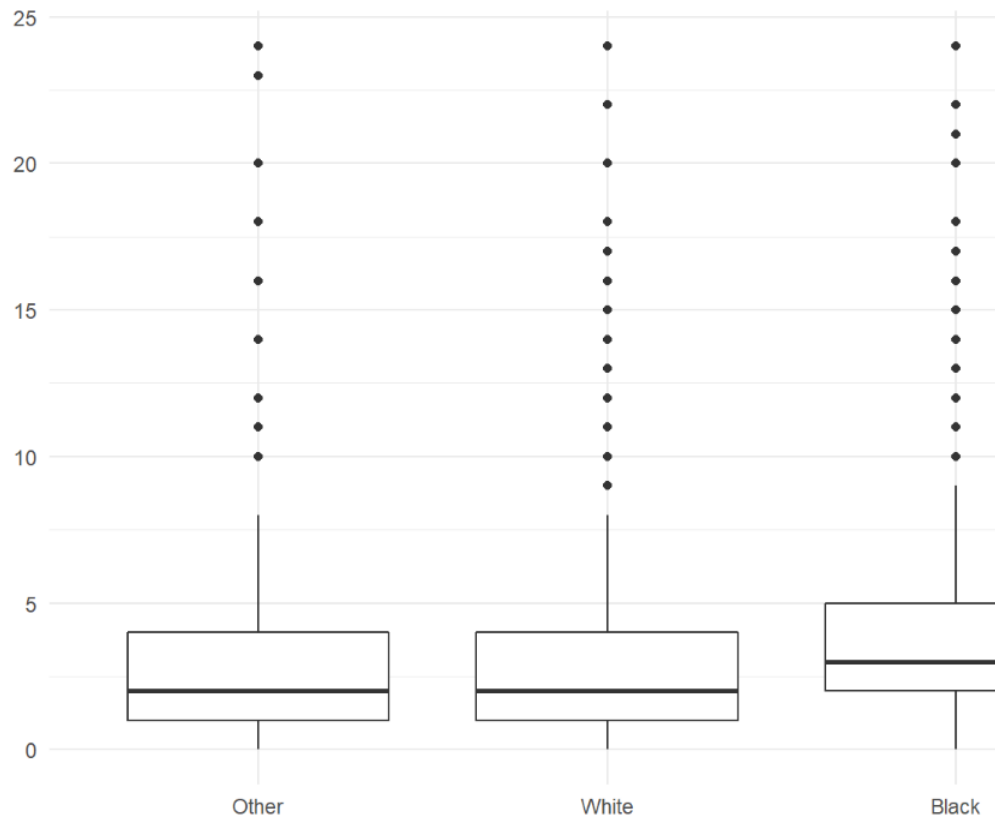

Level 4:
Modifying
Factor Order



- Different Types of Ordering
 - Nominal = “Arbitrary”
 - Ordinal = “Principled”
- Example: Race vs Income
 - Race Levels are Arbitrary
 - Income Levels are Principled

Level 4: Modifying Factor Order



```
head(Social[,c("race", "rincome")])
```

```
## # A tibble: 6 x 2
##   race rincome
##   <fct> <fct>
## 1 White $8000 to 9999
## 2 White $8000 to 9999
## 3 White Not applicable
## 4 White Not applicable
## 5 White Not applicable
## 6 White $20000 - 24999
```

```
str(Social[,c("race", "rincome")])
```

```
## Classes 'tbl_df', 'tbl' and 'data.frame':   21483 obs. of  2 variables:
## $ race   : Factor w/ 4 levels "Other","Black",...: 3 3 3 3 3 3 3 3 3 3 ...
## $ rincome: Factor w/ 16 levels "No answer","Don't know",...: 8 8 16 16 16 5
  4 9 4 4 ...
```

```
levels(Social$race)
```

```
## [1] "Other"          "Black"          "White"          "Not applicable"
```

```
levels(Social$rincome)
```

```
## [1] "No answer"      "$25000 or more"
## [5] "$20000 - 24999" "$15000 - 19999" "$10000 - 14999" "$8000 to 9999"
## [9] "$7000 to 7999"  "$6000 to 6999"  "$5000 to 5999"  "$4000 to 4999"
## [13] "$3000 to 3999"  "$1000 to 2999"  "Lt $1000"       "Not applicable"
```

Level 4: Modifying Factor Order




- Other Useful Functions
 - `fct_relevel()` = Specify Variable and the Specific Levels You Want in The Front
 - `fct_rev()` = Specify Variable and Reverses the Level Order
 - `fct_infreq()` = Order Levels Based on Increasing Frequency
- Combine Functions as Necessary

Level 4: Modifying Factor Order



- Original Boxplot

```
ggplot(Social) +  
  geom_boxplot(aes(x=rincome,y=tvhours)) +  
  coord_flip() +  
  theme_minimal()
```

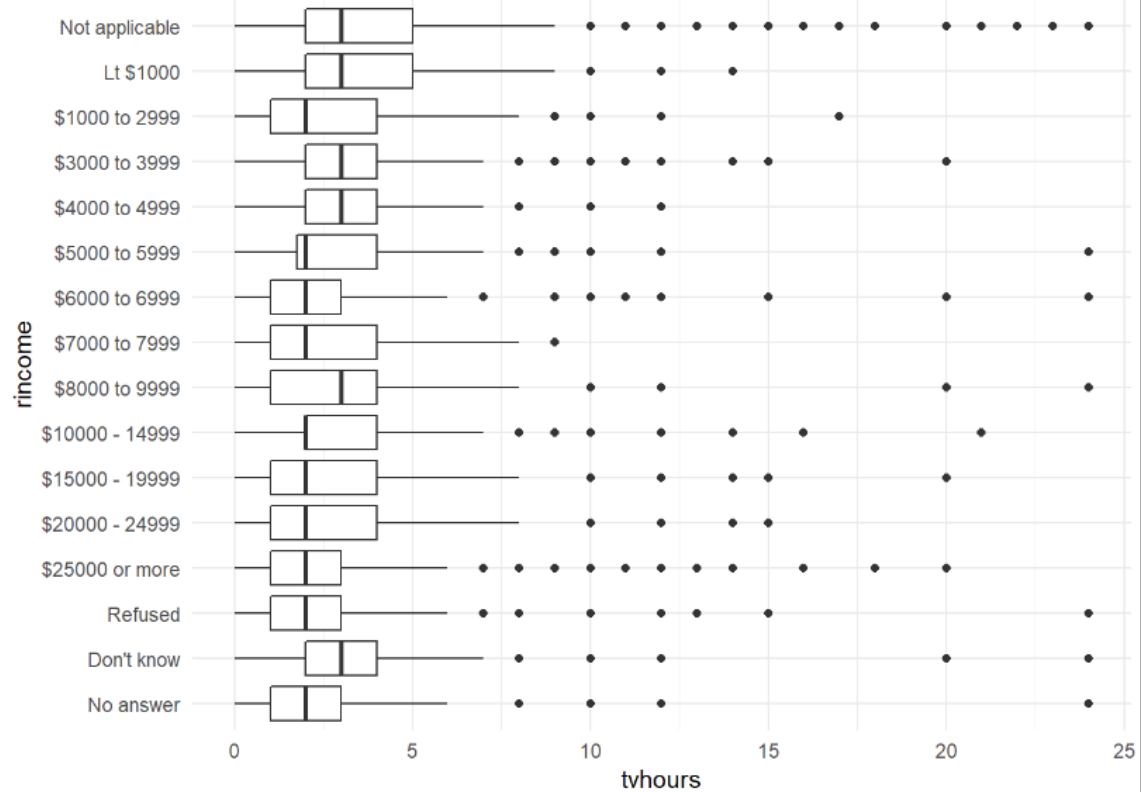


Level 4: Modifying Factor Order



- Example 1: Reverse Income

```
ggplot(Social) +  
  geom_boxplot(aes(x=fct_rev(rincome), y=tvhours)) +  
  coord_flip() +  
  theme_minimal()
```

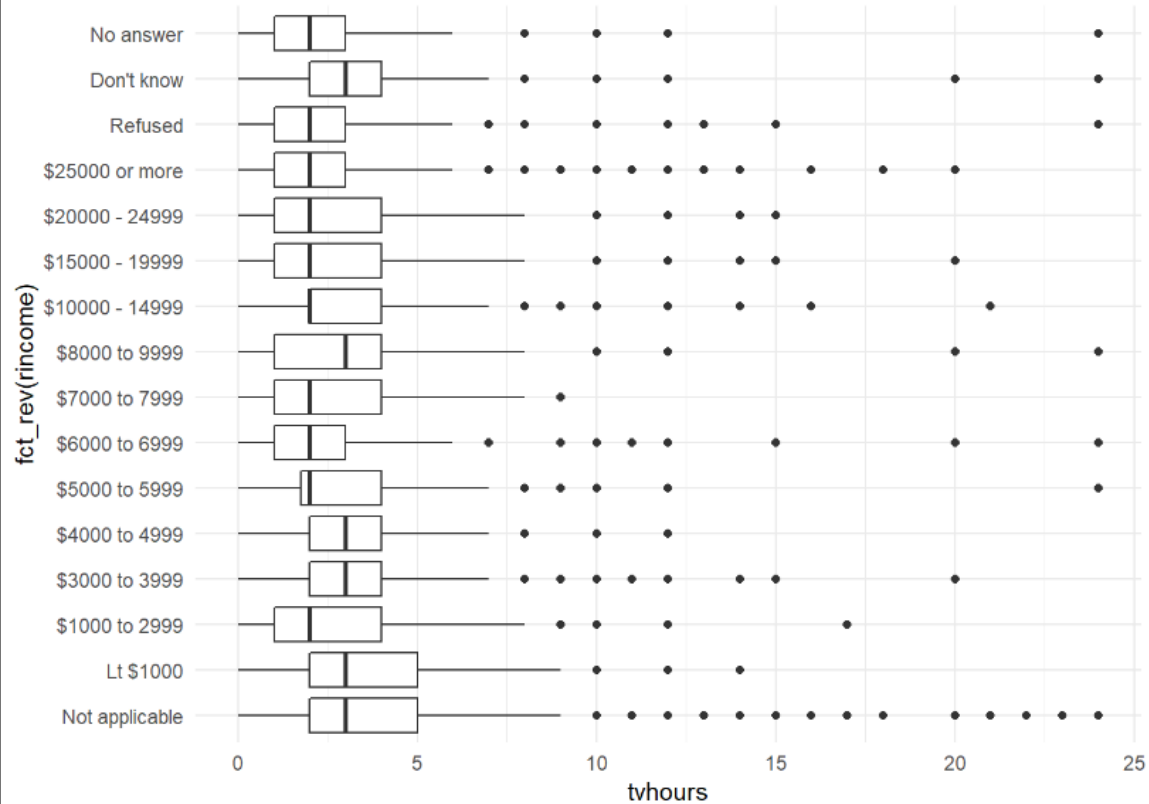


Level 4: Modifying Factor Order



- Example 2: Level Change + Rev

```
ggplot(Social) +  
  geom_boxplot(aes(x=fct_rev(fct_relevel(rincome, "Not applicable")),  
                  y=tvhours)) +  
  coord_flip() +  
  theme_minimal()
```

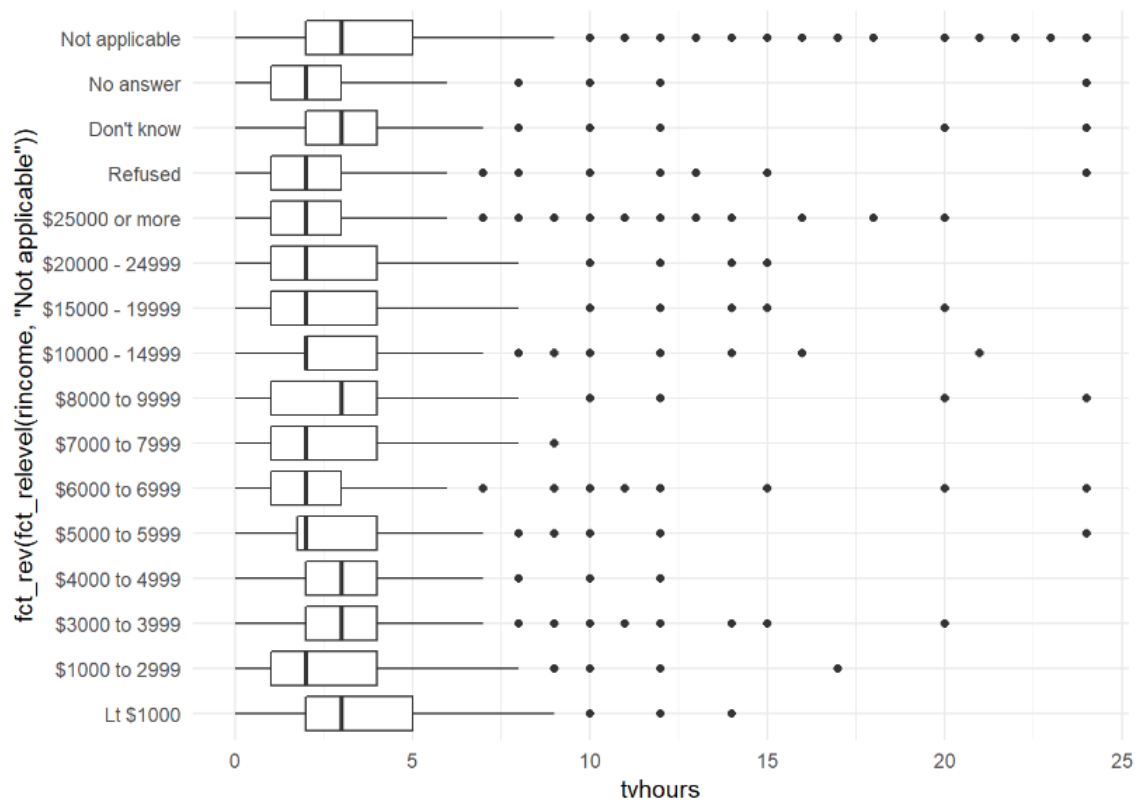

Level 5: Modifying Factor Levels



- Purpose for Modifying Levels
 - Abbreviate or Better Names
 - Collapse Unimportant Levels
 - Group Categories
- Useful Functions
 - `fct_recode()` = Rename Levels
 - `fct_collapse()` = Collapse Levels
 - `fct_lump()` = Create Subgroups

Level 5: Modifying Factor Levels



- Marital Counts

```
Marriage = Social %>%  
  count(marital) %>%  
  mutate(prop=n/sum(n))  
print(Marriage)
```

```
## # A tibble: 6 x 3  
##   marital          n      prop  
##   <fct>          <int>  <dbl>  
## 1 No answer         17 0.000791  
## 2 Never married  5416 0.252  
## 3 Separated        743 0.0346  
## 4 Divorced        3383 0.157  
## 5 Widowed         1807 0.0841  
## 6 Married        10117 0.471
```

Level 5: Modifying Factor Levels



- Example 1: Recode Levels

```
Marriage2 = Social %>%  
  mutate(marital2=fct_recode(marital,  
    "Unknown" = "No answer",  
    "Single" = "Never married"  
  )) %>%  
  count(marital,marital2) %>%  
  mutate(prop=n/sum(n))  
print(Marriage2)
```

```
## # A tibble: 6 x 4  
##   marital      marital2      n      prop  
##   <fct>      <fct>      <int>  <dbl>  
## 1 No answer   Unknown      17 0.000791  
## 2 Never married Single      5416 0.252  
## 3 Separated   Separated    743 0.0346  
## 4 Divorced    Divorced    3383 0.157  
## 5 Widowed     Widowed     1807 0.0841  
## 6 Married     Married    10117 0.471
```


Level 5: Modifying Factor Levels



- Example 2: Collapse Levels

```
levels(Social$marital)
```

```
## [1] "No answer"      "Never married" "Separated"      "Divorced"  
## [5] "Widowed"        "Married"
```

```
Marriage3 = Social %>%  
  mutate(marital2=fct_collapse(marital,  
    Alone = levels(marital)[c(2,4,5)],  
    Together = levels(marital)[c(6)],  
    Confused = levels(marital)[c(1,3)]  
  ) %>%  
  group_by(marital,marital2) %>%  
  summarize(n=n()) %>%  
  ungroup() %>%  
  mutate(prop=n/sum(n))  
print(Marriage3)
```

```
## # A tibble: 6 x 4  
##   marital      marital2     n   prop  
##   <fct>        <fct>   <int> <dbl>  
## 1 No answer    Confused    17 0.000791  
## 2 Never married Alone    5416 0.252  
## 3 Separated    Confused    743 0.0346  
## 4 Divorced     Alone    3383 0.157  
## 5 Widowed     Alone    1807 0.0841  
## 6 Married      Together 10117 0.471
```

Level 5: Modifying Factor Levels



- Example 3: Lumping Levels

```
Marriage4 = Social %>%  
  mutate(marital2=fct_lump(marital)) %>%  
  count(marital,marital2) %>%  
  mutate(prop=n/sum(n))  
print(Marriage4)
```

```
## # A tibble: 6 x 4  
##   marital      marital2      n    prop  
##   <fct>      <fct>      <int>  <dbl>  
## 1 No answer   Other        17 0.000791  
## 2 Never married Never married 5416 0.252  
## 3 Separated   Other        743 0.0346  
## 4 Divorced    Divorced    3383 0.157  
## 5 Widowed     Other        1807 0.0841  
## 6 Married     Married    10117 0.471
```

Level 5: Modifying Factor Levels



- Example 3: Lumping Levels

```
Marriage5 = Social %>%  
  mutate(marital2=fct_lump(marital,2)) %>%  
  count(marital,marital2) %>%  
  mutate(prop=n/sum(n))  
print(Marriage5)
```

```
## # A tibble: 6 x 4  
##   marital      marital2      n      prop  
##   <fct>      <fct>      <int>  <dbl>  
## 1 No answer   Other        17 0.000791  
## 2 Never married Never married 5416 0.252  
## 3 Separated   Other        743 0.0346  
## 4 Divorced    Other        3383 0.157  
## 5 Widowed     Other        1807 0.0841  
## 6 Married     Married     10117 0.471
```

Level 6: Numeric to Factor



- Cut Function
 - Convert Numeric to Factor
 - Syntax
- ```
> cut(VARIABLE, # of Breaks)
```
- Useful In Visuals and Summary
  - Example 1: New Age Variable

```
NewAge = social %>%
 mutate(new.age=cut(age,3))

str(NewAge)
...

tibble [21,483 x 10] (s3: tbl_df/tbl/data.frame)
$ year : int [1:21483] 2000 2000 2000 2000 2000 2000 2000 2000 2000 2000 ...
$ marital: Factor w/ 6 levels "No answer","Never married",...: 2 4 5 2 4 6 2 4 6 6 ...
$ age : int [1:21483] 26 48 67 39 25 25 36 44 44 47 ...
$ race : Factor w/ 4 levels "other","Black",...: 3 3 3 3 3 3 3 3 3 3 ...
$ rincome: Factor w/ 16 levels "No answer","Don't know",...: 8 8 16 16 16 5 4 9 4 4 ...
$ partyid: Factor w/ 10 levels "No answer","Don't know",...: 6 5 7 6 9 10 5 8 9 4 ...
$ relig : Factor w/ 16 levels "No answer","Don't know",...: 15 15 15 6 12 15 5 15 15 15 ...
$ denom : Factor w/ 30 levels "No answer","Don't know",...: 25 23 3 30 30 25 30 15 4 25 ...
$ tvhours: int [1:21483] 12 NA 2 4 1 NA 3 NA 0 3 ...
$ new.age: Factor w/ 3 levels "(17.9,41.7]",...: 1 2 3 1 1 1 1 2 2 2 ...
[1] "(17.9,41.7]" "(41.7,65.3]" "(65.3,89.1]"
```

```
levels(NewAge$new.age)
...
[1] "(17.9,41.7]" "(41.7,65.3]" "(65.3,89.1]"
```

## Level 6: Numeric to Factor



- Example 2: Make It Pretty

```
NewAge = social %>%
 mutate(new.age=cut(age,pretty(age,3)))
```

```
levels(NewAge$new.age)
```

```
[1] "(0,20]" "(20,40]" "(40,60]" "(60,80]" "(80,100]"
```



What Happened?

- Example 3: Label Levels

```
NewAge = social %>%
 mutate(new.age=cut(age,3,
 labels=c("Young","Middle","old")))
```

```
levels(NewAge$new.age)
```

```
[1] "Young" "Middle" "old"
```

## Level 6: Numeric to Factor



- Example 4: Using Percentiles
  - Goal: Cut on the Quartiles
  - Use Quantile Function

```
NewAge = Social %>%
 mutate(new.age=cut(age,
 quantile(Social$age,c(0,0.25,0.5,0.75,1),na.rm=T)))

levels(NewAge$new.age)
....

[1] "(18,33]" "(33,46]" "(46,59]" "(59,89]"
```

- Helpful Package `> library(expss)`

```
NewAge=select(NewAge,age,marital) %>%
 apply_labels(age="Age",marital="Marital Status")

cro_cases(NewAge$age,list(NewAge$marital,total()))
```

|              | Marital Status |               |           |          |         |         | #Total |
|--------------|----------------|---------------|-----------|----------|---------|---------|--------|
|              | No answer      | Never married | Separated | Divorced | Widowed | Married |        |
| Age          |                |               |           |          |         |         |        |
| (17.9,35.8]  | 1              | 3490          | 197       | 413      | 26      | 2241    | 6368   |
| (35.8,53.5]  | 5              | 1364          | 350       | 1546     | 156     | 4175    | 7596   |
| (53.5,71.2]  | 3              | 462           | 163       | 1169     | 578     | 2817    | 5192   |
| (71.2,89.1]  | 1              | 86            | 31        | 236      | 1040    | 857     | 2251   |
| #Total cases | 10             | 5402          | 741       | 3364     | 1800    | 10090   | 21407  |

Closing



Disperse  
and Make  
Reasonable  
Decisions